





PUSH SWITCH BS SERIES

- DC30V 0.1A (BS580,BS701,BS800)
- DC30V 0.3A, DC16V 0.5A (BS850)
- Initial Contact resistance: 50m Ohms Max
- Insulation resistance: 100M Ohms min.
- Dielectric strength:AC125V 1 minute.(BS580,BS701)
AC250V 1 minute.(BS800,BS850)
- Electrical life: 10,000 cycles




BS	800	N
SERIES SYMBOL	HOUSING DIM	FUNCTION
	580 5.8 x 5.8mm	N MONENTARY
	701 7.0 x 7.0mm	L LOCK
	800 8.0 x 8.0mm	
	850 8.5 x 8.5mm	

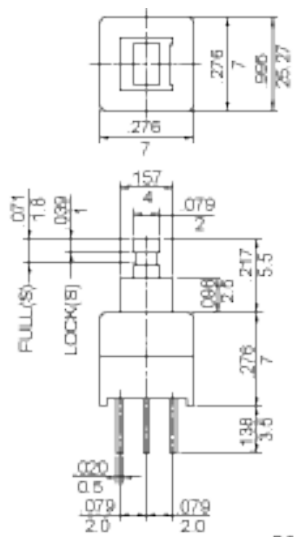



BS-701L

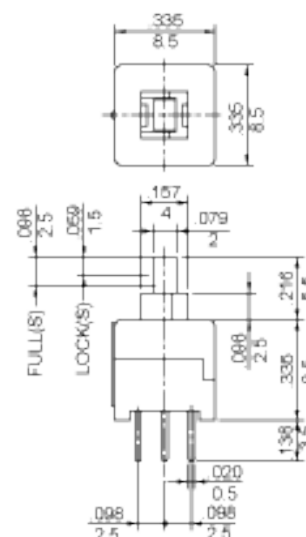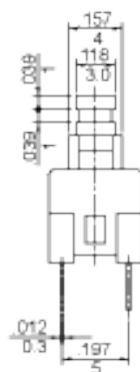




BS-850L

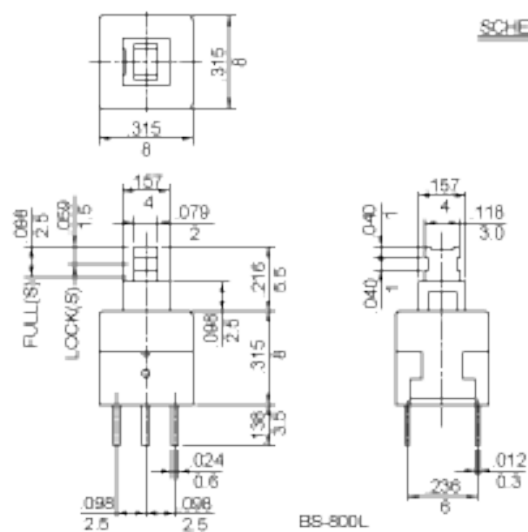

BS-800L

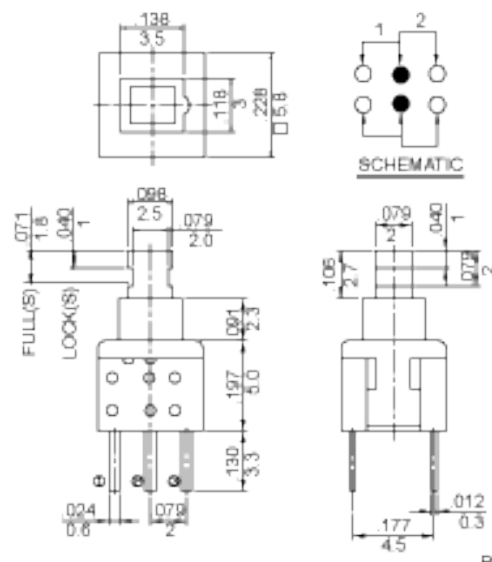

BIS-580



P.C.B LAYOUT