


CONTACT RATING

1 FORM A(1PST)	Resistive (Cos.θ = 1)	0.45W	AC 125V	10A
			AC 250V/DC30V	5A
		0.2W	AC 125V	5A
			AC 250V/DC30V	3A
1 FORM C(1PDT)	Resistive (Cos.θ = 1)	0.45W	AC 250V/DC30V	3A

DIMENSIONS(±0.2mm)

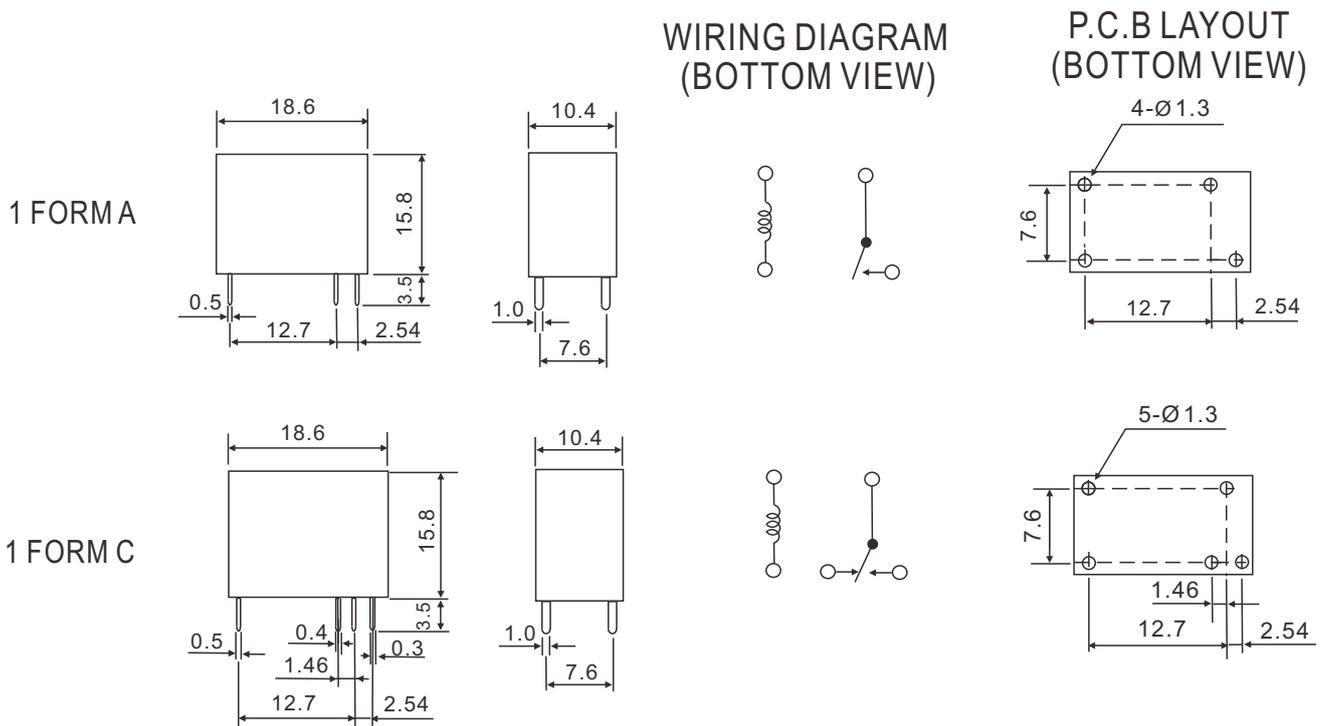

GENERAL DATA

Insulation Resistance	1000 MΩ Min. (DC 500V)
Dielectric Strength	1000 VAC, 50/60Hz between contact.
	A:3,500,C:2500/ VAC, 50/60Hz between all elements.
Contact Material	Ag Alloy.
Contact Resistance	100 milliohms max. (initial value)
Shock Resistance	Malfunction: 10G(11ms) ; Destructive: 100G(6ms)
Vibration Resistance	Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
	Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm
Operation Time	10 ms max.
Release Time	5 ms max.
Temperature Range	- 30°C ~ + 80°C
Expected Life	With operation rate 30/min.
	Mechanical - 10,000,000 operations min.
	Electrical - 100,000 operations min. at rated load.
Weight	6 grams