


TOGGLE SWITCH MA SERIES



- 3A 120VAC, 1.5A 250VAC (UL)
- 3A 28VDC (UL)
- Initial contact resistance : 20m ohm (max.)
- Insulation resistance : 1000M ohm (min)
- Dielectric strength : 1,000VAC for 1 minute
- Life cycle : 30,000 cycles
- Temperature range : -30°C to + 130°C
- Base : Diallyl phthalate (DAP).
- Actuator : Toggle, brass chrome plated
- Gasket: nickel plated steel
- Nuts: brass, nickel plated
- Bushing : Brass, nickel plated
- Housing : Stainless steel
- Terminals : silver plated brass, gold plated optional
- contact : Silver plated brass
- gold plated optional

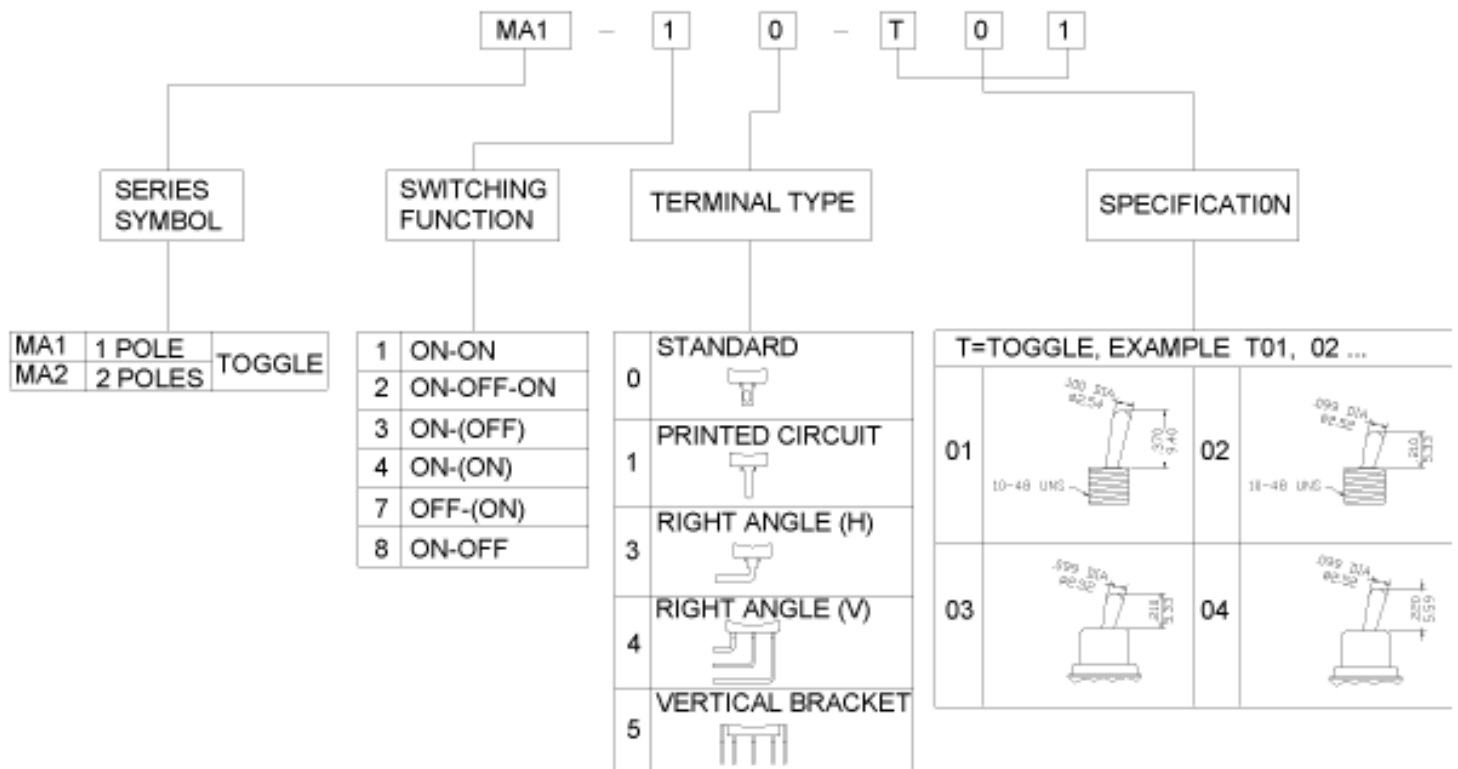

TOGGLE SWITCH MA SERIES

