


SPEC SHEET

Terminal :	Brass, Tin plated,0.8 t
Insulator body :	PC(UL94V-0), Black
Screw :	#6-32, steel, Ni plated
Operation temperatures :	-40° C to +120° C
Rated current :	20Amp 300V
Insulation withstands volt :	2000V 1min
Insulation resistance :	2000MΩ at DC 500V
Wire range :	12-22 AWG
Screw torque :	12 lb-in

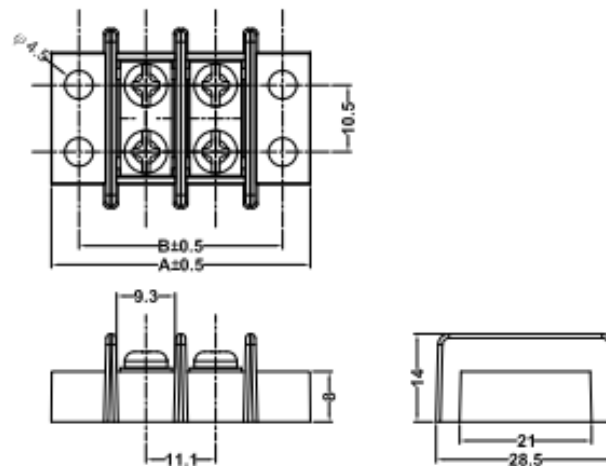

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A(mm)	41.20	52.20	63.20	74.20	85.20	96.20	107.20	118.20	129.20	140.20	151.20	162.20	173.20	184.20	195.20
B(mm)	28.70	39.70	50.70	61.70	72.70	83.70	94.70	105.70	116.70	127.70	138.70	149.70	160.70	171.70	182.70
Poles	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
A(mm)	206.20	217.20	228.20	239.20	250.20	261.20	272.20	283.20	294.20	305.20					
B(mm)	193.70	204.70	215.70	226.70	237.70	248.70	259.70	270.70	281.70	292.70					