


SPEC SHEET

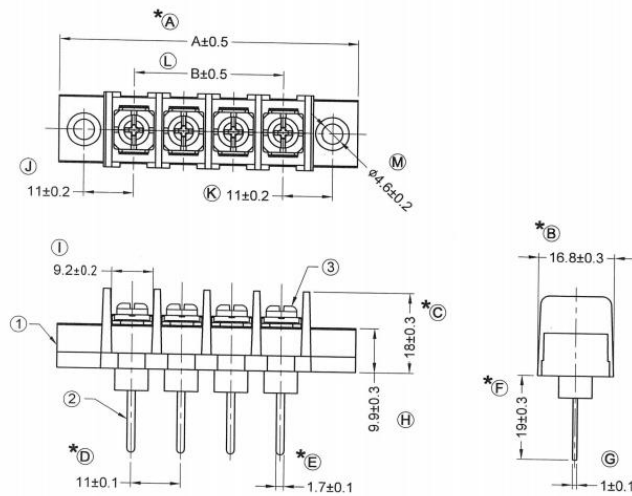

RoHS
Compliant

Pitch : 11.00mm (0.433inch)

Poles	A(mm)	B(mm)	Poles	A(mm)	B(mm)
2	44.00	11.00	16	198.00	165.00
3	55.00	22.00	17	209.00	176.00
4	66.00	33.00	18	220.00	187.00
5	77.00	44.00	19	231.00	198.00
6	88.00	55.00	20	242.00	209.00
7	99.00	66.00	21	253.00	220.00
8	110.00	77.00	22	264.00	231.00
9	121.00	88.00	23	275.00	242.00
10	132.00	99.00	24	286.00	253.00
11	143.00	110.00	25	297.00	264.00
12	154.00	121.00	26	308.00	275.00
13	165.00	132.00	27	319.00	286.00
14	176.00	143.00	28	330.00	297.00
15	187.00	154.00			

Current rating : 25Amp 300V
 Insulation withstands volt : AC2000V min
 Insulation resistance : >2000MΩ DC500V
 Operation temperature : -40°C to +120°C
 Wire range : 12~22 AWG
 Wire strip length : 9~10mm
 Screw torque : 16.0 lb-inch