


- Switching rating : 25mA, 24VDC.
- Contact resistance : 100mΩ max. at initial.
- Dielectric strength : 500VAC/1minute.
- Circuit : 3 switching positions
- Electrical life : 2,000 operation cycles per switch 24VDC, 25mA
- Mechanical life: 2,000 operations
- Operation force: 1,000 gf. max.
- Stroke: 0.8mm
- Operation Temp.: -20 to + 85 °C
- Storage Temp.: -40 to + 85 °C
- Base & Cover: UL94V-0 Nylon High-temp Thermoplastic. Black
- Actuator: UL94V-0 LCP High-temp Thermoplastic. White
- Contact: Alloy Cooper with gold plated

PCB layout

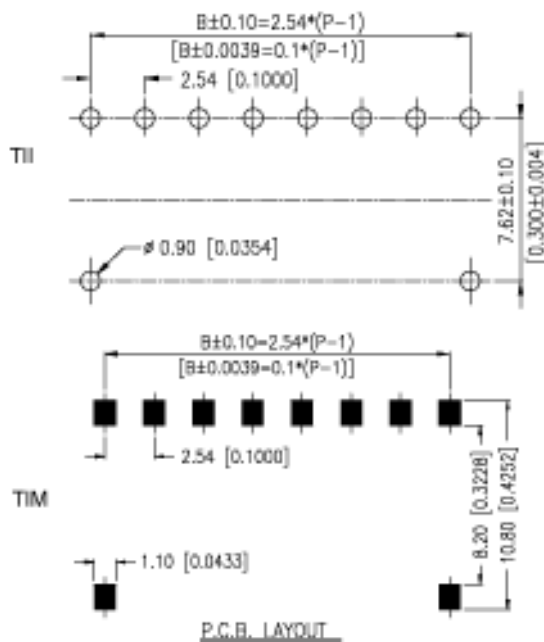


How to order

TI	M	R	—	09	—
SERIES SYMBOL	MOUNTING	ACTUATOR	POSITIONS	SEALED	PACKAGE
	I THROUGH HOLE	RAISED	04 4 Positions	REGULAR	TUBE
	M SMT	R RECESSED	08 8 Positions	T TOP TAPE SEALED	T/R TAPE & REEL
			09 9 Positions		
			10 10 Positions		

DIP SWITCH TI SERIES

TII(R)-08

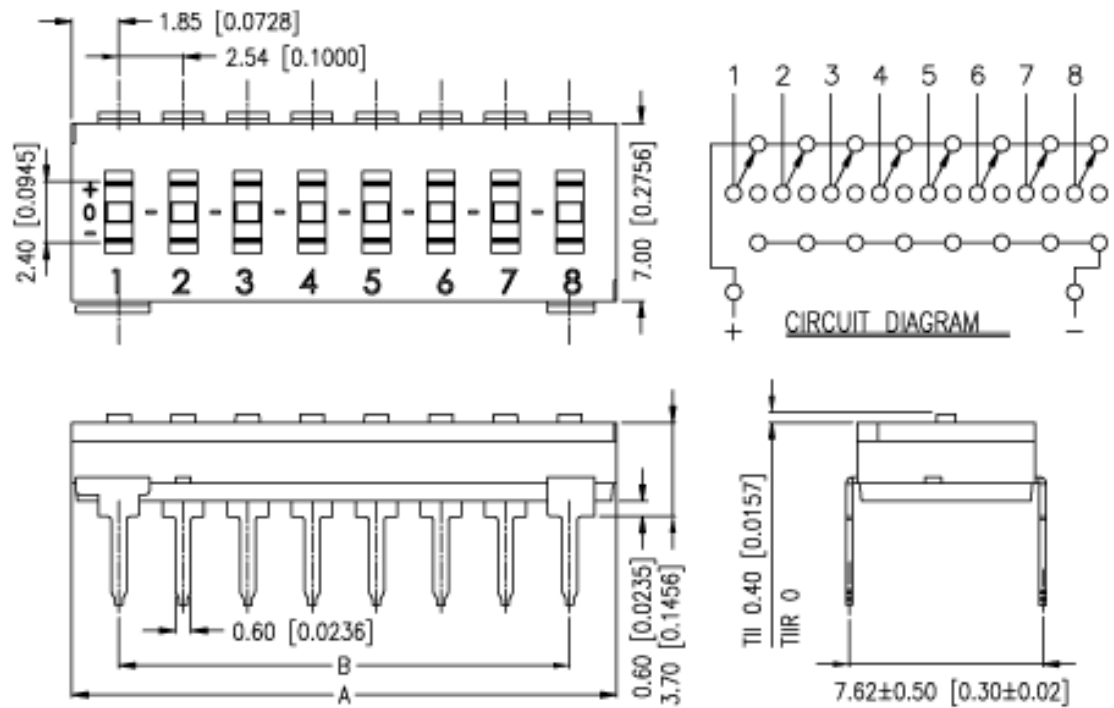

TIM(R)-08

